

ATLANTIQUE


ARCHITECTURAL OUTDOOR LIGHTING



ARCHITECTURAL OUTDOOR LIGHTING

drive over


ATLANTIQUE

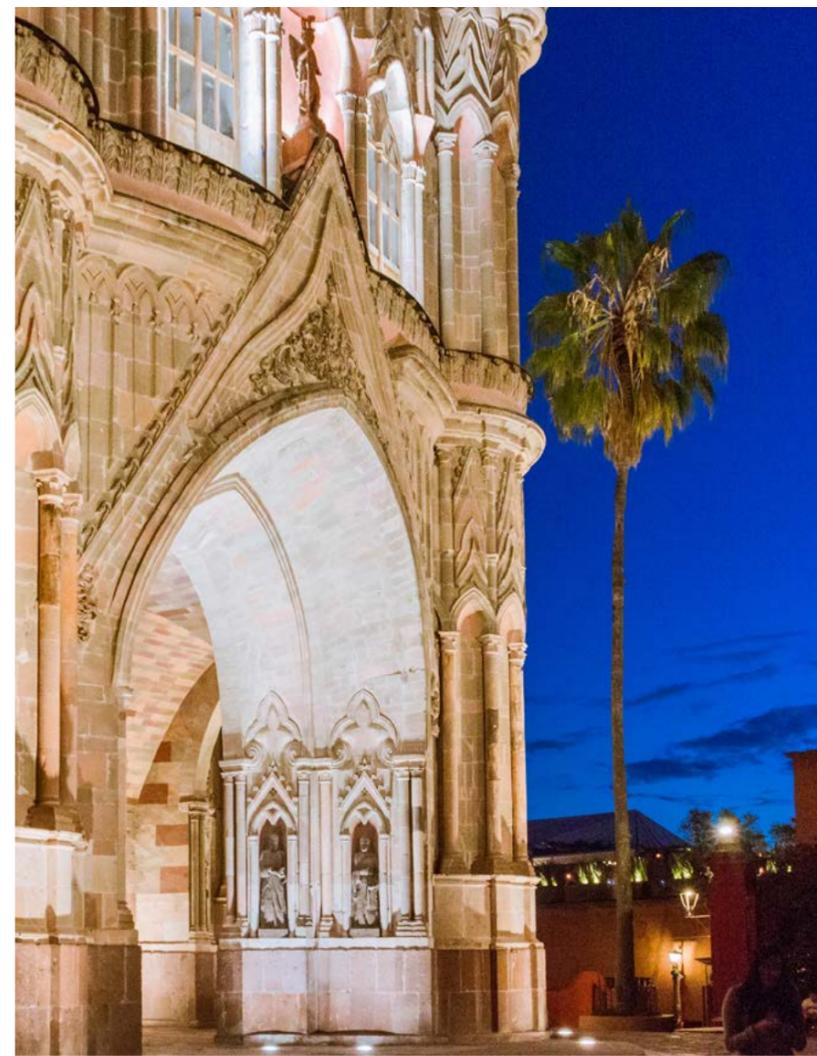

ARCHITECTURAL OUTDOOR LIGHTING

drive over

A device to be ground recessed with high-performance LED sources. Atlantique can light large spaces and surfaces. For these features, it also particularly works well in parks, gardens and for lighting large trees.

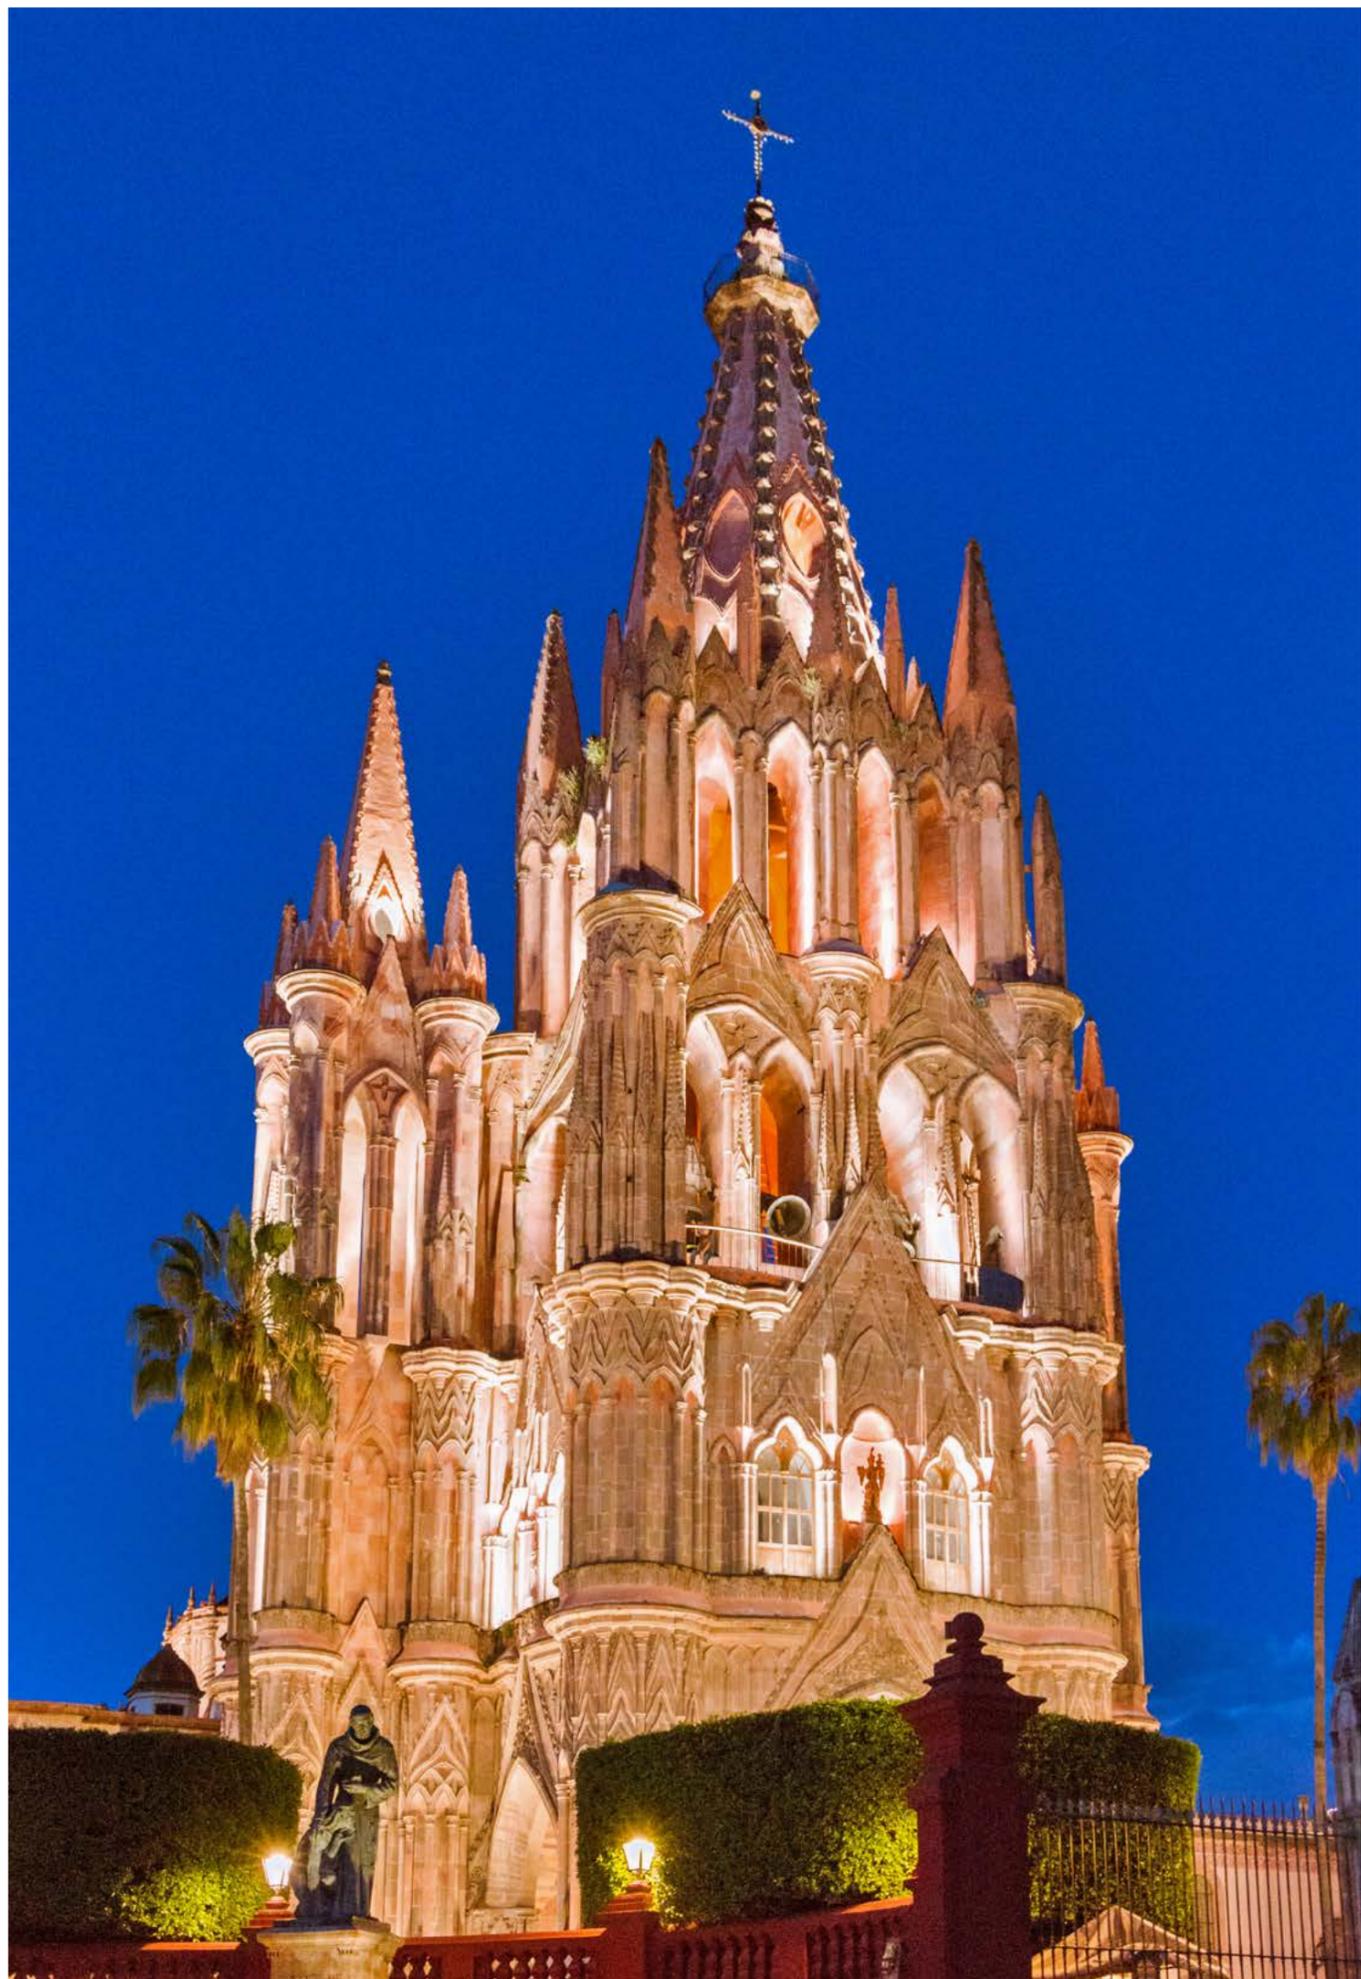

ATLANTIQUE

ARCHITECTURAL OUTDOOR LIGHTING

drive over

drive over



drive over

IP68 full dry (2m)
IK 10
2500 Kg

12 mm tempered
extra clear glass

ø 277 x h. 160 mm

white LED version
3 m cable length

RGBW LED version
2,5 m cable length



WHITE 18 LED
3000K CRI>80
220-240V 0/50/60Hz ⊕
2700K / 4000K
available on request



32W | 2700 lm (*)
spot



9°
20700 cd/klm



32W | 3115 lm (*)
medium



26°
3850 cd/klm



32W | 2100 lm (*)
large



40°
1615 cd/klm



32W | 2585 lm (*)
elliptical



51° x 12°
4000 cd/klm

RGBW LED
max. 700mA ⚡
4 channels +
1 channel NTC



35W
spot
9°



35W
medium
28°



35W
large
45°



35W
elliptical
51° x 12°

(*) Real Data

details

Die-cast body and closing flange made of aluminium alloy with very low copper content, extremely robust. A4 Stainless steel screws. IP68 Degree of protection with Full Dry system which avoids condensing inside the product. Outer casing Installation cast in concrete with a 20-30 cm gravel drainage bed. Only an IP68 connection to the power supply can guarantee the same protection to the appliance. Aluminium outer casing to be ordered separately. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray.

standard finish



.01 black

